

**FENIX RACING****SET-UP SHEET****MISTRAL 2.0**



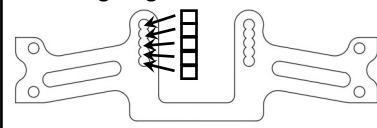
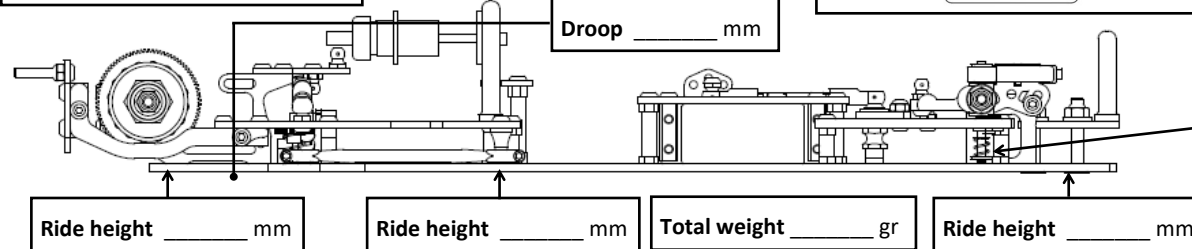
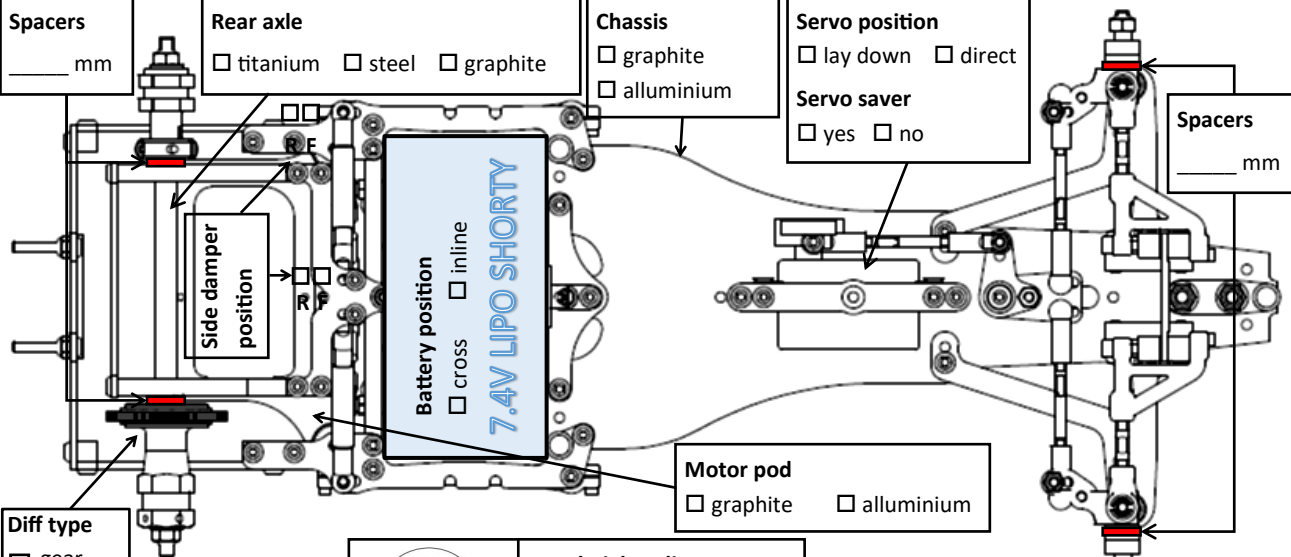
DATE: / / EVENT:

TRACK: CONDITION: ☐ carpet ☐ asphalt ☐ indoor ☐ outdoor ☐ smooth ☐ bumpy

TRACTION: ☐ low ☐ medium ☐ high TEMPERATURE: °/C air °/C track

DRIVER NAME: BEST LAP TIME: QUALIFYING POSITION:

FINAL POSITION: Gear type: ☐ 48 dp ☐ 64 dp Spur Gear: T Pinion Gear: T FDR:

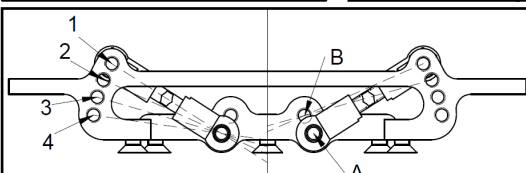


Side damper tubeOil: / cstDroop mm**Rear wing height****Side spring**brand ☐ soft ☐ medium ☐ hard ☐ other **Front spring**brand ☐ soft ☐ medium ☐ hard ☐ other Oil / cstRide height mmRide height mmTotal weight grRide height mm**Spacers** mm**Rear axle**☐ titanium ☐ steel ☐ graphite**Chassis**☐ graphite ☐ aluminium**Servo position**☐ lay down ☐ direct**Servo saver**☐ yes ☐ no**Spacers** mm

Side damper position

Battery position

☐ cross ☐ inline

7.4V LIPO SHORTY

Motor pod☐ graphite ☐ aluminium**Diff type**☐ gear
grease:
☐ spheres
setting: ☐ loose ☐ medium ☐ tight**Rear height adjuster**☐ 0,5 ☐ 1,0 ☐ 1,5
☐ 2,0 ☐ 2,5 ☐ 3,0Mounting ☐ up ☐ down**Front camber**Left: °Right: °**Width**Front: mmRear: mm**Toe angle**+/- °**Roll center position**☐ A1 ☐ A2 ☐ A3 ☐ A4 ☐ B1 ☐ B2**Shock**Oil: / cst
Rebound: %
Total length: mm
Piston: holes
Spring: **Wheelbase** mm**Steering knuckle**Brand **FRONT tire setting**Brand / type: /
Additive / time: /
Tire warmer: ☐ NO ☐ YES °C time: min**REAR tire setting**Brand / type: /
Additive / time: /
Tire warmer: ☐ NO ☐ YES °C time: min**ESC & setting**Brand: Model:
Brake force: % Punch:
Drag brake: ☐ NO ☐ SI %**Transmitter & setting**Brand: Model:
EPA TH: % EPA BR: %
EPA ST: left % right %
D/R ST: % Brake: %**Body**Brand: Model: **Front wing**Brand: Model: ☐ 1 flap ☐ 2 flaps ☐ 3 flaps**Rear wing**Brand: Model: